

Features:

- Universal AC input / Full range
- Programmable output Voltage (0% ~ 105%)
- Programmable output Current (0% ~ 105%)
- **Built-in active PFC Function**
- Forced current sharing at parallel operation (Refer to pg. 5 for connection diagram)
- **Constant current limit**
- Selectable +5V / 0.5A or +9V / 0.3A auxiliary output
- Global control via RS232
- Remote setting multiple via RS232, RS485 & I2C
- **Power OK signal**
- Remote ON / OFF function
- Protection: OVP, OLP, OTP, SCP, Fan failure








	MODEL	AEK-3000-150	AEK-3000-200	AEK-3000-250	AEK-3000-300	AEK-3000-400		
	DC Voltage Rated	150V	200V	250V	300V	400V		
	Rated Current	20A	15A	12A	10A	7.5A		
	Current Range	0 ~ 20A	0 ~ 15A	0 ~ 12A	0 ~ 10A	0 ~ 7.5A		
	Rated Power	3000W	0 10/1	10 .2.	0 10/1	0 1.671		
		1500mVp-p	2000mVp-p	2500mVp-p	3000mVp-p	4000mVp-p		
Output	Voltage Adj. Range		±5.0% Typical adjustment by potentiometer. (Via V-Adj from PSU front panel)					
			±2.0% (rated output voltage of single unit)					
	Current Tolerance	±3.0% (rated output current of single unit)						
	Line Regulation	±1.0%	unone or onigio unity					
	Load Regulation	±1.0%						
	Setup, Rise Time	1100ms, 350ms at full load						
	Hold Up Time (Typ.)	14ms / 230VAC at full load						
	Voltage Range Note.4		90 ~ 264VAC, 127 ~ 370VDC (Refer to de-rating curve)					
Input	Frequency Range	47 ~ 63Hz	TOVEO (Neich to de fath	ig curve)				
	Power Factor (Typ.)		115VAC at full load					
	Efficiency (Max.)	0.95 / 230VAC, 0.98 / 115VAC at full load						
mput	AC Current (Max.)		93% 19.7A / 115VAC (2000W), 14.5A / 230VAC (3000W)					
	Inrush Current (Typ.)	19.7A / 115VAC (2000W), 14.5A / 230VAC (3000W) 33A / 115VAC, 65A / 230VAC						
	Leakage Current	· ·						
	Leakage Current	< 3.5mA / 240VAC						
	Over Load	105% rated output power						
Duetestien		Protection type: Constant current limit						
Protection	Over Voltage	Variable OVP Refer to VCI VS OVP curve.(OVP Tolerance 7%) Protection type: Latch-style (Recovery after reset AC power ON or inhibit)						
	Over Temperature	**	• • •	•	· · · · · · · · · · · · · · · · · · ·			
	·		C, Protection type: Auto r		ture goes down			
	Auxiliary Power		or +9V / 0.3A auxiliary or	utput				
	Remote ON / OFF Control By external switch Power OK Signal Open drain signal low when PSU turns on, Max. sink current: 20mA, Max. drain voltage: 40V.							
Function	Power OK Signal				Max. drain voltage: 40V.			
	Output Voltage Trim		oltage is between 0 ~ 10					
	Output Current Trim	Adjustment of output current is between 0 ~ 105% of rated output						
		Please refer to page 5						
	Working Temp.	-20 ~ +60°C (Refer to d	,					
	Working Humidity	20 ~ 90% RH non-cond						
Environment	Storage Temp. & Humidity	-40 ~ +85°C, 10 ~ 95%						
	Temp. Coefficient	±0.02% / °C (0 ~ 50°C)						
	Vibration	10 ~ 500Hz, 2G 10min. / 1cycle, period for 60min. each along X, Y, Z axes Compliance to IEC 60068-2-6, IEC 60068-2-64						
	Safety Standards	Certified EN 62368-1;		0.0.000 0.77 77 77	1 (A O (TOT) (D T)			
	Withstand Voltage Note.7	*	DC),I/P-FG:1.5KVAC(21		VAC(707VDC)			
Safety & EMC	Isolation Resistance	, , ,	G: 100M Ohms / 500VD	C (25°C/70%PH)				
,	EMI Conduction Radiation	Certified EN 55032						
	Power Harmonic & Voltage Fluctuation and Flicker	Certified EN 61000-3-2	2; EN 61000-3-3					
	EMS Immunity	Certified EN 55024; IE	C 61000-4-2,3,4,5,6,8,1	1				
	Cooling	Load and temperature	control fan					
Others	Dimension (WxHxD)	170x64x280 mm / 6.69	x2.52x11.02 inch					
	Packing	3.3kg; 6pcs / 22.7kg / 2	2.48CUFT					
Note	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor. 3. Tolerance: includes setup time tolerance, line regulation and load regulation. 4. De-rating may apply in low input voltage. Please check the de-rating curve for more details. 5. In parallel connection only one unit will operate if the total output load is less than 5% of the rated power. 6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 7. This test is done without enclosure: I/P-O/P 4242VDC. If with enclosure: I/P-O/P 2121VDC,I/P-FG:2121VDC, O/P-FG: 707VDC							



Mechanical Drawings:



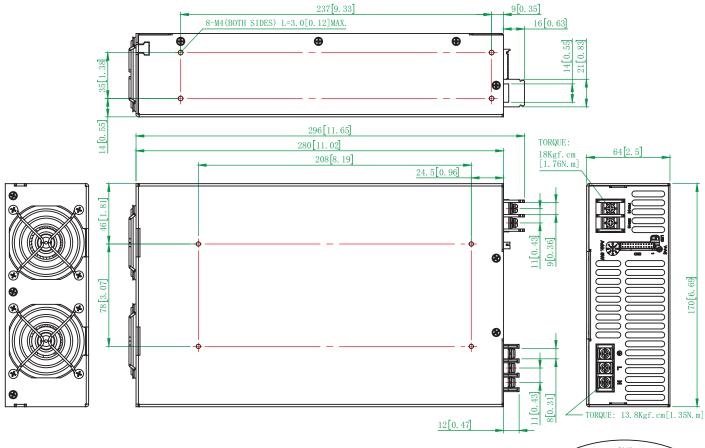

Recommended screw length is measured from the power supply surface

AC Input Terminal Pin No. Assignment

Pin No.	Assignment		
L	ACL		
N	ACN		
Ť	÷		

0000000000000

Control pin number assignment (CN5): JST S24B-PHDSS or equivalent

Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment	Mating Housing / Contact	
1	NC.	9	EN-	17	AUX		
2	NC.	10	GND	18	GND		
3	NC.	11	EN+	19	SCL		
4	NC.	12	AUX	20	SDA		JST SPHD-002T-P0.5
5	POK	13	ACI	21	AUX	or equivalent	or equivalent
6	GND	14	GND	22	GND		
7	PAR	15	VCI	23	RX		
8	VSET	16	GND	24	TX		

CN5 Function Description:

Pin No.	Function	Description	Pin No.	Function	Description
1	NC.		13	ACI	I Program
2	NC.		14	GND	Ground
3	NC.		15 VCI V Program		V Program
4	NC.		16	GND	Ground
5	POK	Power OK	17	AUX	+5V / 0.5A or +9V / 0.3A Auxiliary power
6	GND	Ground	18	GND	Ground
7	PAR	Parallel operation current share	19	SCL	Serial Clock used in the I ² C interface
8	VSET	Aux output setting	20	SDA	Serial Data used in the I ² C interface
9	EN-	Inhibit ON/OFF (-)	21	AUX	+5V / 0.5A or +9V / 0.3A Auxiliary power
10	GND	Ground	22	GND	Ground
11	EN+	Inhibit ON/OFF (+)	23	RX	For RS232 Receiver function
12	AUX	+5V / 0.5A or +9V / 0.3A Auxiliary power	24	TX	For RS232 Transmission function





LED Status:

LED	LED Signal	Status	
Solid(Green)		Power OK (Local mode)	
Solid(Orange)		Power OK (Remote mode)	
Slow Blink(Green)		Power Standby (Local mode)	
Slow Blink(Orange)		Power Standby (Remote mode)	
Fast Blink(Red)		Over Voltage Protection (OVP)	
Solid(Red)		Over Load Protection (OLP)	
Slow Blink(Red)		Over Temperature Protection (OTP)	
Intermittent Blink(Red)		Fan Failure	
Interlace Blink(Red)		Power Failure	


^{*}Local mode: Use ACI/VCI control output current and voltage. Remote mode: Use RS-232 or I²C command control output current and voltage.

De-rating Curve:




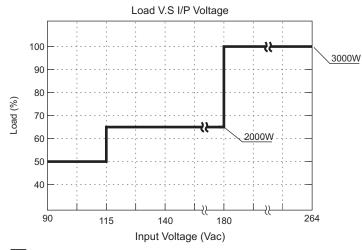


CMD VS Output Curve:



VCI VS OVP Curve:




To ensure the power supply output voltage and current could be accurately adjusted, please make sure to adjust the output voltage and current > 10% vs. the rated voltage and current. (e.g. for a 300V unit, please adjust the DC output voltage above 30V to ensure accuracy; same applies to the output current)

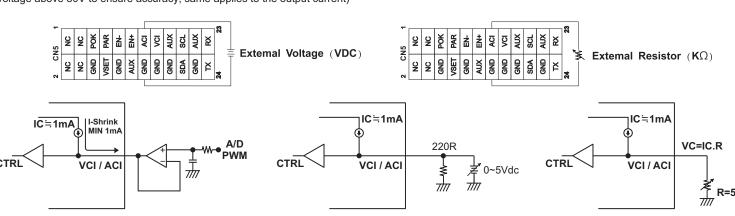



Remote ON/OFF:

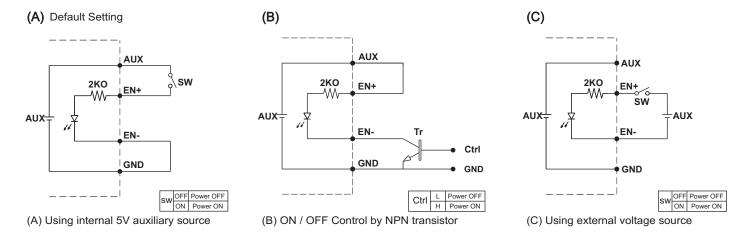


^{*}GND shown in above diagram is referring to the GND of CN2, not the Grounding from main power(NEG-).*


Power OK Signal & Auxiliary Power Setting:

*The grounding of "AUX" power and P.OK signal should be connected to "GND" port. If " VO-" is connected as Grounding, make sure to short the GND and VO- ports.

Open drain signal low when PSU turns on, Max. P.OK sink current: 20mA, Max. drain voltage: 40V.

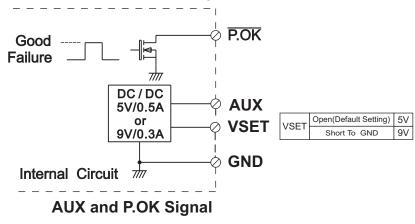

*Place an additional capacitor to have a better performance of auxiliary power operation.




Do NOT exceed 5V/0.5A or 9V/0.3A

^{*}GND shown in above diagram is referring to the GND of CN2, not the Grounding from main power(NEG-).*



1. Current Sharing

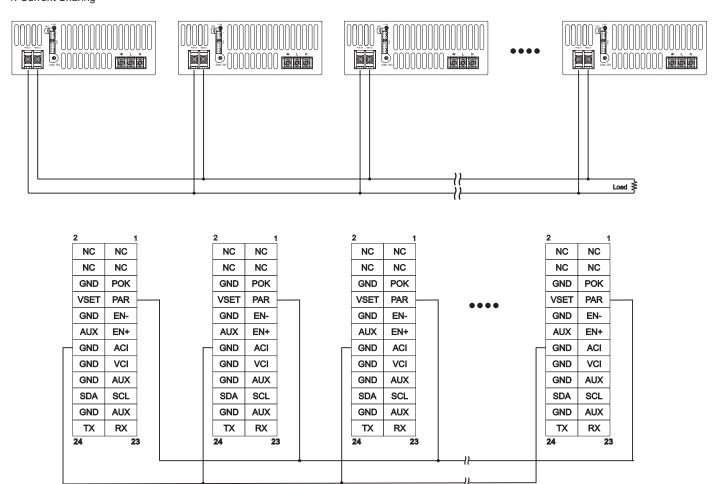


Please connect PAR pins together for current sharing function For Series connection, make sure to isolate CN2 control signals



Installation Instruction:

1. Mounting Directions

1-1 Recommended standard mounting methods:

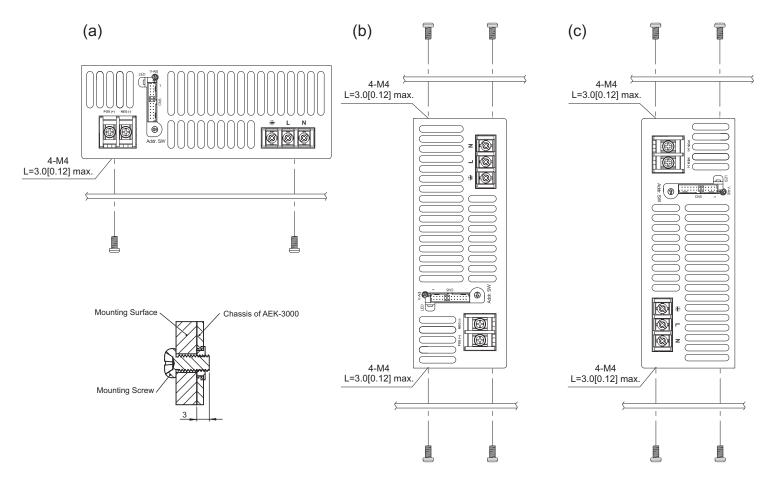

Recommended screw length is measured from the power supply surface

2. Mounting Method

- 2-1 There are ventilating holes on the front and back side panels, do not obstruct; allow 50mm at least for air flow.
- 2-2 The Maximum allowable penetration of screw is 3mm. Incomplete threading should not be penetrated.
- 2-3 Recommended the torque of mounting screw: M4 screw: 1.27N • m (13.0kgf • cm)

